

PRE-SELECTION CETETHERM AQUACOMPACT

1. AQUACOMPACT = STAINLESS STEEL STORAGE TANK + PRE-ASSEMBLED KIT

- AquaCompact units - **STANDARD VERSION** (without a primary kit)



- ☐ Copper brazed
- ☐ 100% stainless steel fusion-bonded



- ☐ Plates & gaskets



- ☐ Plates & gaskets with insulation

- + Charging pump
- + Balancing valve
- + 10 bar pressure relief valve
- + Isolating valve and connection pipework and flexible(s)
- + Two additional CIP (Cleaning In Place) connections for Copper Brazed and 100% stainless steel heat exchangers

- AquaCompact units - **WITH A PRIMARY KIT** (optional)



- ☐ 2-port valve Self-Actuated



- ☐ 2-port valve Electronic



- ☐ 3-port valve Electronic

2. FLOWCHART



- ☒ Indirect (Semi-instantaneous)
- ☒ Cetetherm AquaTank: storage tank stainless steel 316Ti / 10 bar Insulation neodul
Volume: (300 - 1500L)

3. CAPACITY IN KW

4. FLOWCHART (L/SEC)

SELECT
1 OUT OF 3

5. APPLICATIONS

Apartment blocks



- Number of apartments
- Type: studio, 1-bedroom, 2-bedroom,

Hotels



- Number of rooms
- Nombre of stars

Hospitals / Nursery homes



- Number of rooms
- Number of beds/room

6. TEMPERATURES

PRIMARY

☐ 90°C

☐ 82°C

☐ 70°C

☐ 65°C

☐ Other

SECONDARY

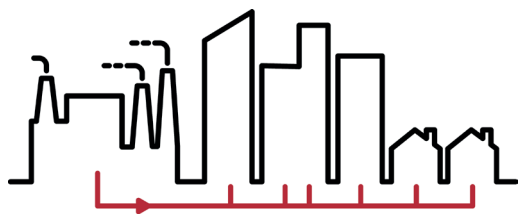
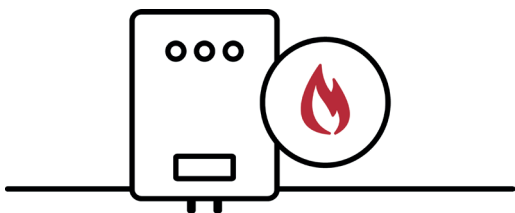
☐ 10/55 °C

☐ 10/60°C

☐ Other

.....

7. PRIMARY SIDE CONNECTION


☐ District heating network

☐ Gas boiler

Please send your completed file to info.uk@cetetherm.com