

PRE-SELECTION CETETHERM AQUACOMPACT NEO 2026

1. AQUACOMPACT = STAINLESS STEEL STORAGE TANK + PRE-ASSEMBLED KIT

AquaCompact units - STANDARD VERSION (without a primary kit)



☐ Copper brazed



☐ Plates & gaskets with insulation

- Charging pump
- Balancing valve
- 10 bar pressure relief valve
- Isolating valve and connection pipework and flexible(s)
- Two additional CIP (Cleaning In Place) connections for Copper Brazed heat exchangers

AquaCompact units - WITH A PRIMARY KIT (optional)



☐ 2-port valve Electronic



☐ 3-port valve Electronic

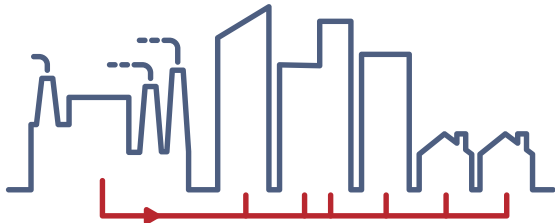
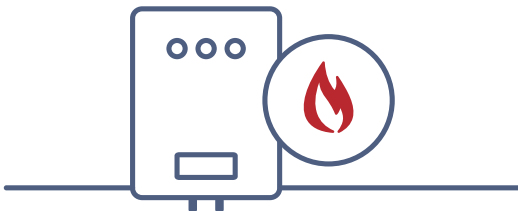
2. STORAGE TANK



AquaTank :
Storage tank stainless steel 316Ti
PN 10 bar with Neodul insulation

VOLUME

- ☐ 300 L
- ☐ 500 L
- ☐ 750 L
- ☐ 1000 L

3. CAPACITY IN KW		4. FLOW (L/SEC)	
5. APPLICATIONS			
Apartments blocks  • Number of apartments • Type: studio, 1-bedroom, 2-bedroom...	Hotels  • Number of rooms • Number of stars	Hospitals / Nursery homes  • Number of rooms • Number of beds/room	
6. TEMPERATURES			
PRIMARY	☐ 90°C	☐ 80°C	☐ 70°C
	☐ 65°C	☐ Other	
SECONDARY	☐ 10/55°C	☐ 10/60°C	☐ Other
7. PRIMARY SIDE CONNECTION			
 ☐ District heating network		 ☐ Gas boiler	

Please send your completed file to info.uk@cetetherm.com